
# DE800-8
# 3 inch HF driver






## Specification

| | |
|---|---|
| Throat Diameter | 34mm |
| Nominal Impedance | 8ohms |
| Nominal Power Handling(1) | 100W |
| Continuous Power Handling(2) | 200W |
| Sensitivity(1M1W)(3) | 108dB |
| Frequency Range | 0.6-18KHz |
| Voice Coil Diameter | 75mm |
| Winding Material | Aluminium |
| Former Material | Kapton |
| Winding Depth | 2.8mm |
| Magnetic Gap Depth | 3mm |
| Fs | 600Hz |
| Recommended crossover | 1.2KHz |
| Inductance | 0.11mH |
| Diaphragm Material | Titanium |
| Flux Desity | 1.8T |
| Magnet Material | Neodymium |

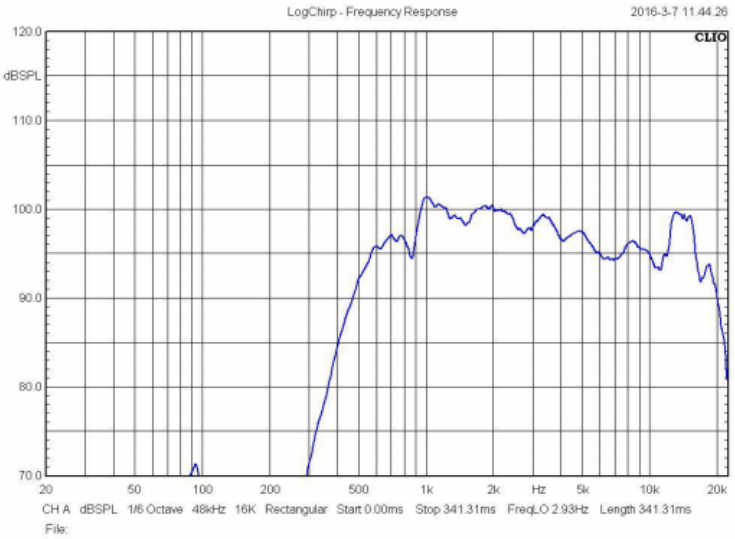


## Mounting and Shipping Information

| | |
|---|---|
| Overall diameter | 120mm |
| Depth | 56mm |
| Net Weight | 2.05kg |
| Shipping Weight | 2.1kg |
| Shipping Box | 132*132*75mm |

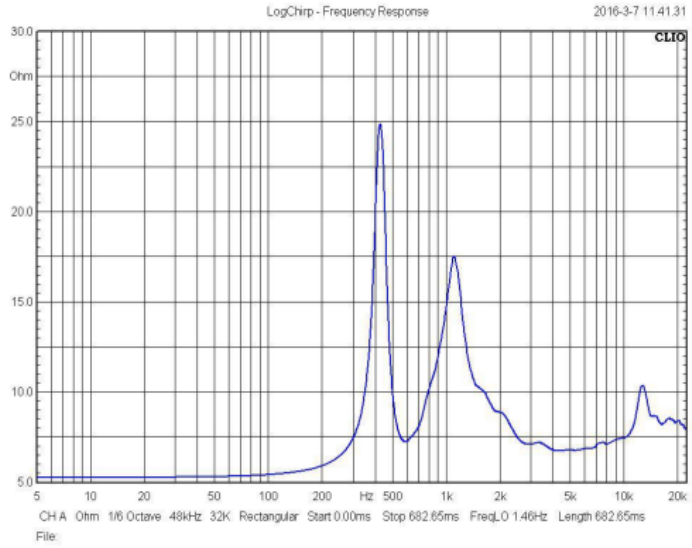


(1) 2 hours test made with continuous pink noise signal(6 dB crest factor)
Power calculated on rated minimum impedance
(2) Power on Continuous Program is defined as 3 dB greater than the nominal rating
(3) Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance

**https://www.china-sanway.com/**