



DE680TN-16 2.5 inch HF driver




Features:

- 160 W continuous program power capacity
- 1.4' horn throat diameter
- 65 mm (2.5 in) aluminium voice coil



SPECIFICATIONS¹

Throat Diameter Nominal	36 mm (1.4 in)
Impedance Minimum	8 Ω
Impedance Nominal Power	7.9 Ω
Handling ² Continuous Power	80 W
Handling ³ Sensitivity ⁴	160 W
Frequency Range	107.0 dB
Recommended Crossover ⁵	1.0 - 18.0 kHz
Voice Coil Diameter Winding	1.2 kHz
Material Inductance	65 mm (2.5 in)
Diaphragm Material Flux	Aluminium
Density Magnet Material	0.15 mH
	Titanium
	1.8 T
	Neodymium Ring

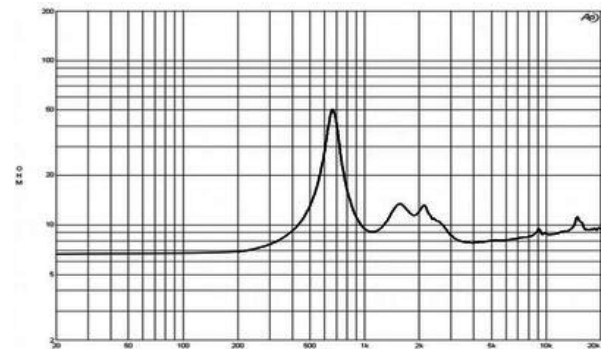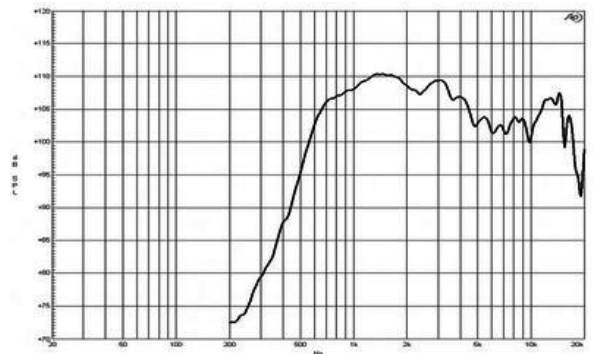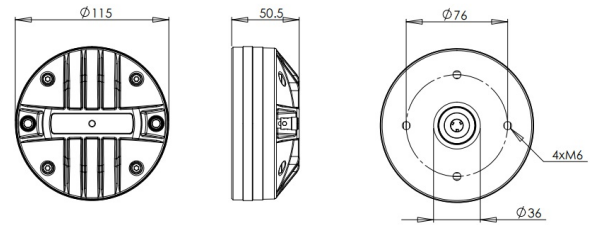

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter	
Overall Diameter	115 mm (4.5 in)
Depth	52 mm (2.0 in)
Net Weight	1.75 kg (3.85 lb)
Shipping Units	4
Shipping Weight	7.5 kg (16.53 lb)
Shipping Box	
265x135x170 mm (10.43x5.31x6.69 in)	

REPLACEMENT DIAPHRAGM

MMD6208

<https://www.china-sanway.com/>